


ASCENT™ LINEAR PREMIUM SERIES 46 DIRECT VENT GAS FIREPLACE




Specifications

Model	BTU	Width		Height		Depth		Viewing Area
		Actual	Framing	Actual	Framing	Actual	Framing	
BLX46	24,000	46 7/8	47 3/8	39 1/16	39 3/8	18 5/16	18 9/16	14 1/8 x 39


Dimensions

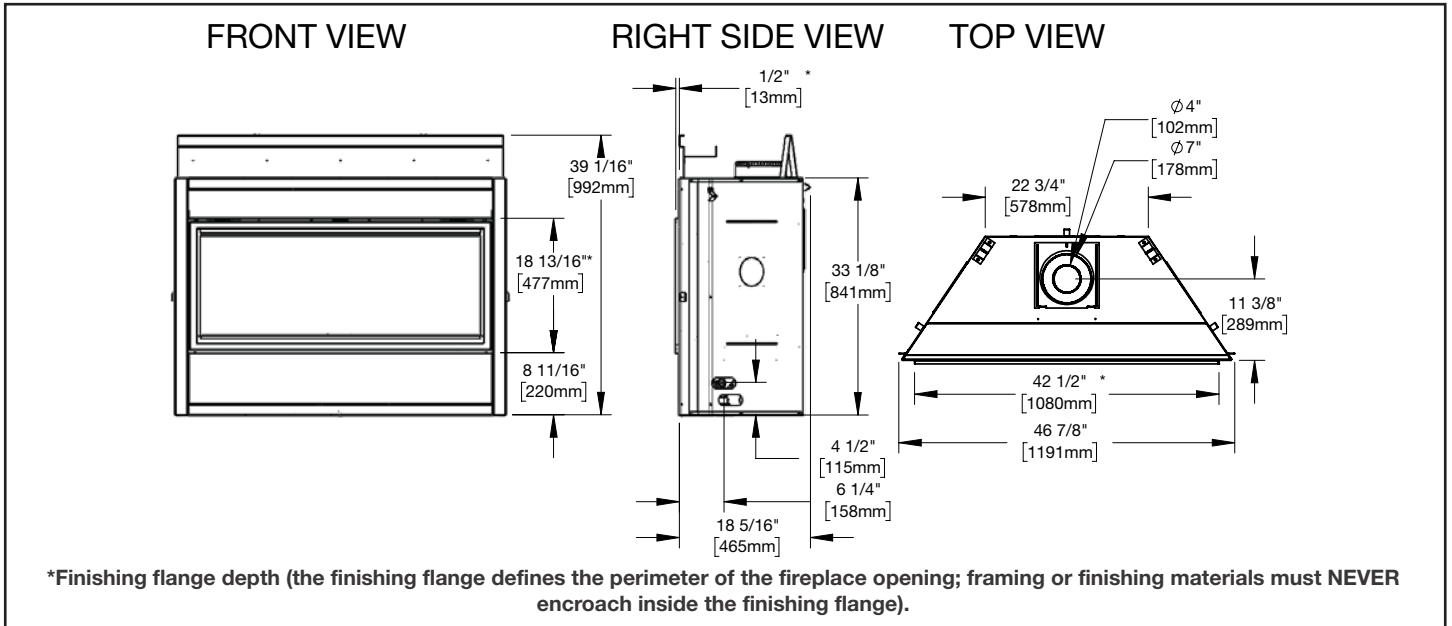


Appliance Location

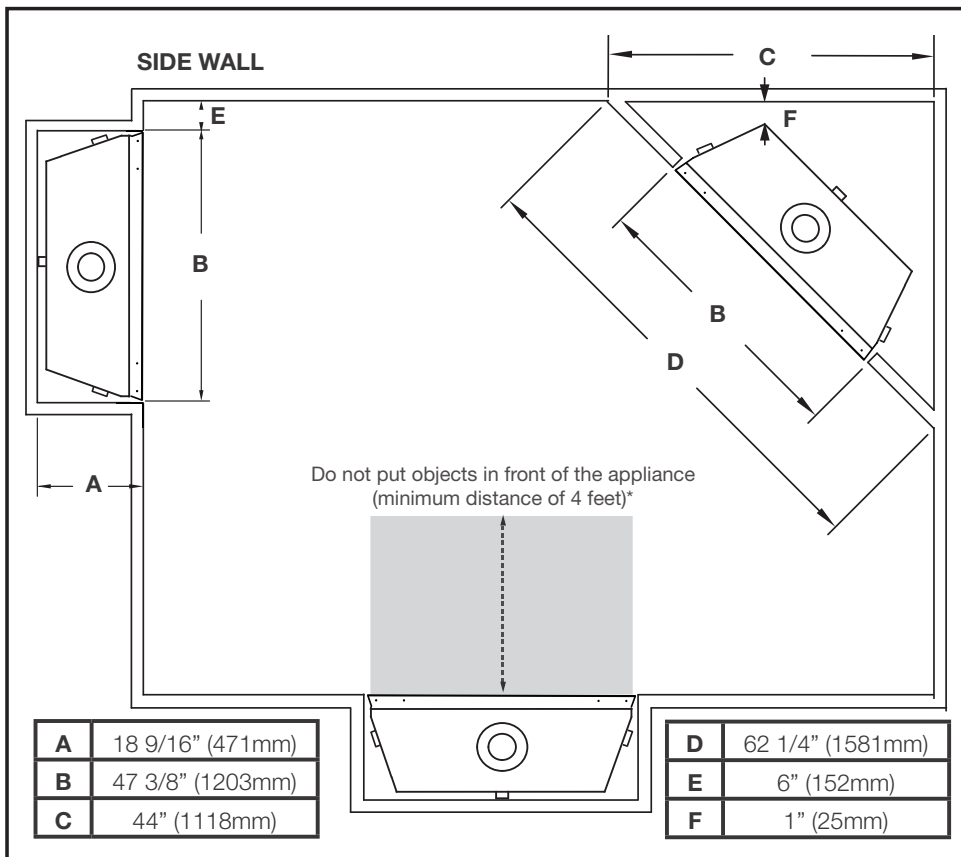

Combustible Mantel Clearances

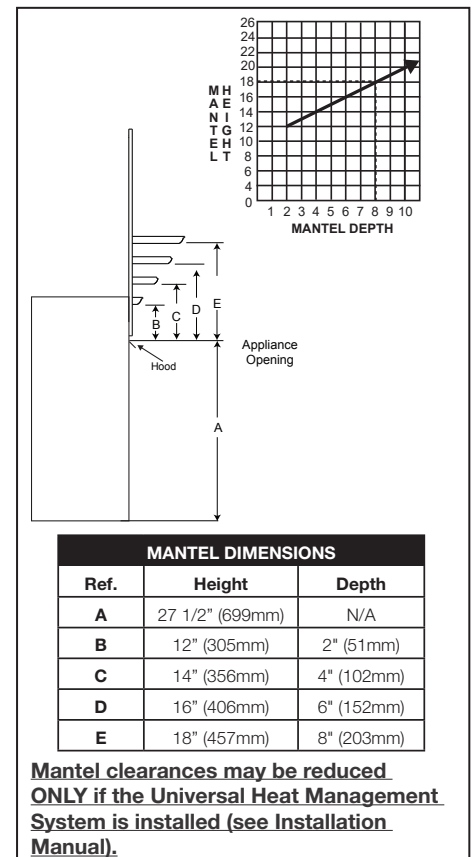


Wall Penetration



⚠ WARNING

-
- Diagram illustrating the installation of a built-in oven into a cabinet structure. The diagram shows the oven unit installed within a cabinet, with dimensions and components labeled:
- CEILING**: Indicated by a line pointing to the top of the cabinet structure.
 - COMBUSTIBLE HEADER**: Indicated by a line pointing to the top horizontal support structure.
 - MINIMUM FROM BASE OF APPLIANCE**: Indicated by a vertical dimension line labeled **G**.
 - 14" (35.6cm) MIN**: Indicated by a horizontal dimension line showing the minimum clearance between the oven door and the combustibles header.
 - DRYWALL**: Indicated by a line pointing to the wall structure.
 - F**: Vertical dimension from the floor to the bottom of the oven unit.
 - B**: Horizontal dimension from the wall to the front of the oven unit.
 - A**: Horizontal dimension from the front of the oven unit to the wall.
- | Dimension | Value |
|-----------|------------------|
| B | 47 3/8" (1203mm) |

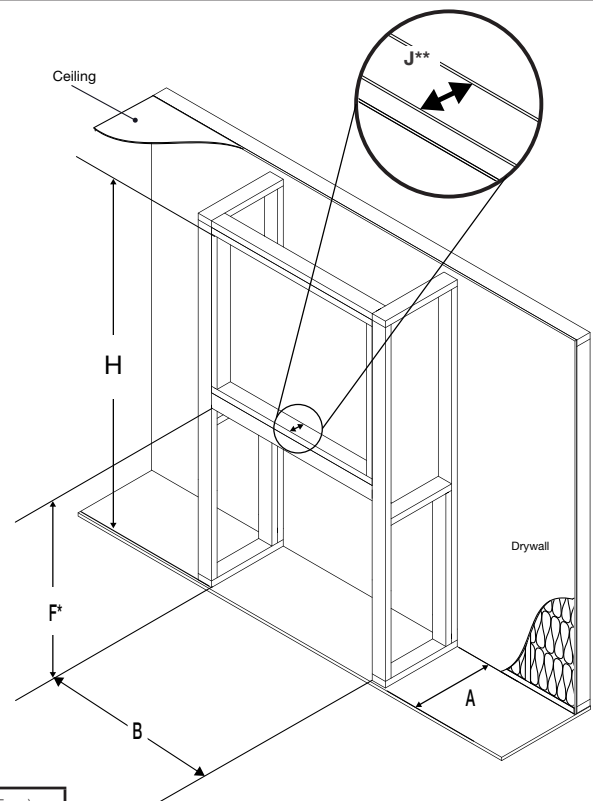

B	47 3/8" (1203mm)	H	84" (2135mm)
F	39 3/8" (1000mm)	I	3 1/2" (89mm)
A	18 9/16" (471mm)		
G	56" (1422mm)		


* Allow for finished floor and hearth thickness when setting these dimensions.

** 2" x 4" frame can be "backed" with 3/4" ply to support TV mounting hardware.


Spécifications

Modèle	BTU	Largeur		Hauteur		Profondeur		Dimensions de Vision
		Réel	Ossature	Réel	Ossature	Réel	Ossature	
BLX46	24,000	46 7/8	47 3/8	39 1/16	39 3/8	18 5/16	18 9/16	14 1/8 x 39


Dimensions

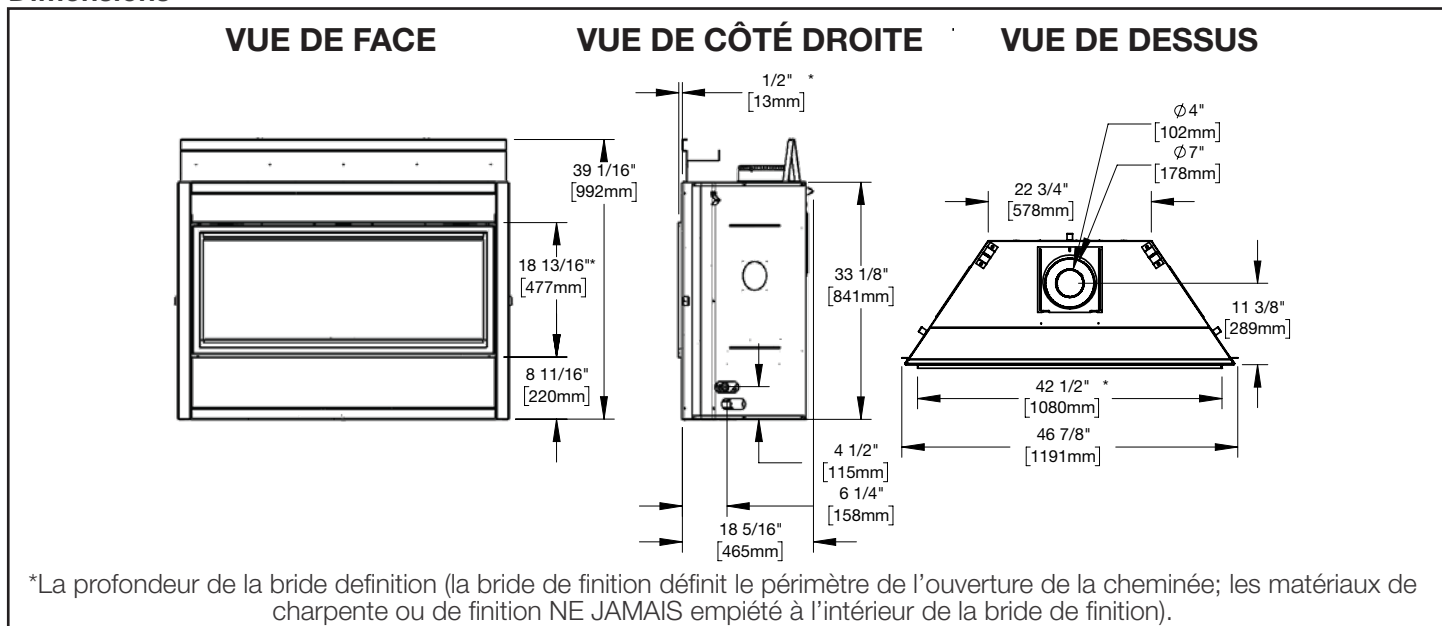


Emplacement de l'appareil

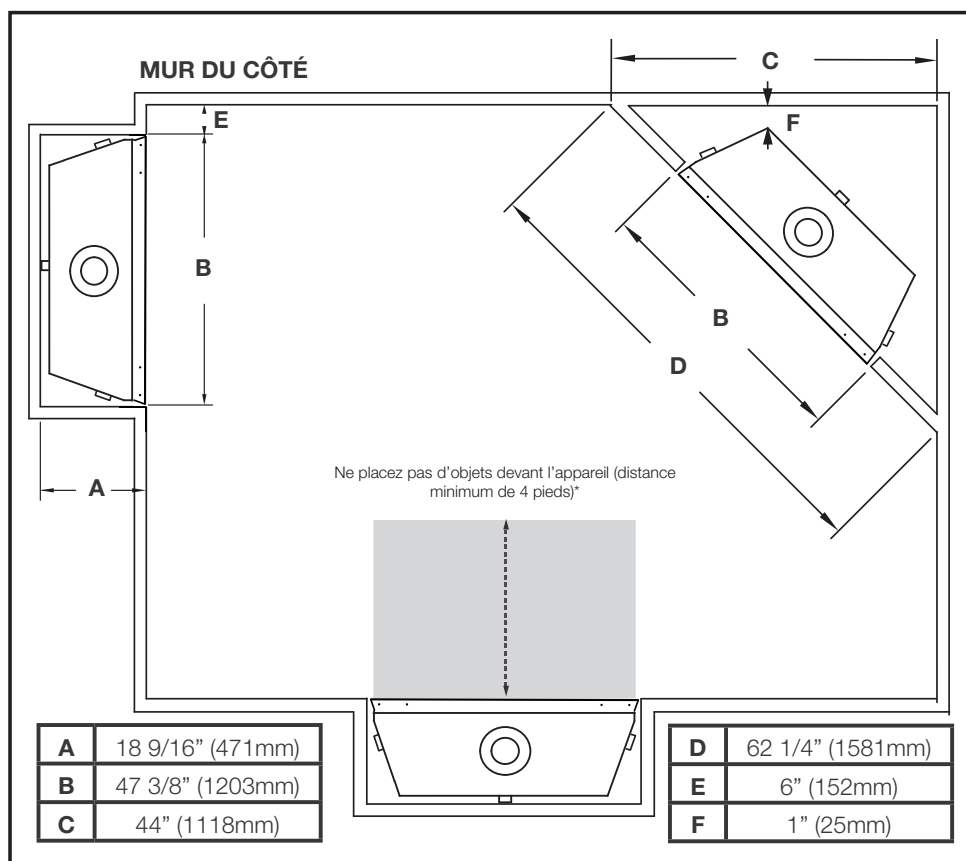

Dégagements Combustibles de la Tablette

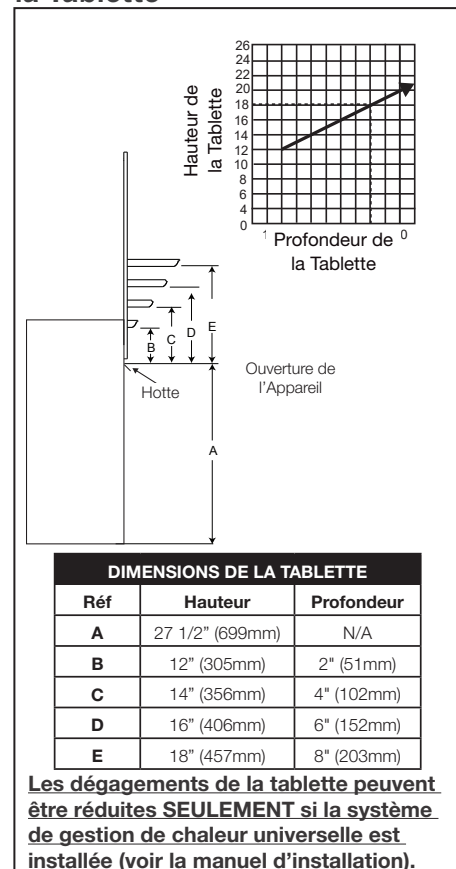

Pénétration du Mur

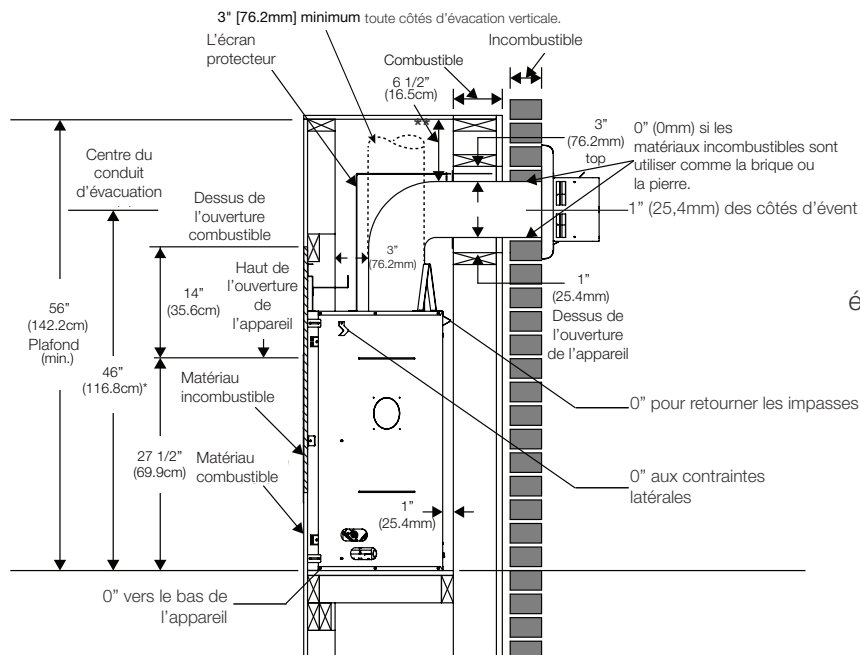


** Dégagements dedans l'enceinte peut être élevés, voir la section « dimensions minimaux de l'encadrement ».

L'écran protecteur est télescopique et doivent être ajusté à protection toute la profondeur de la pénétration de la paroi combustible.


⚠ AVERTISSEMENT

- Ne construisez pas dans cet espace de 14" (35,6cm) de largeur, centré le long de l'avant de l'appareil. Cet espace doit resté libre afin d'offrir un dégagement adéquat pour l'évacuation. Aucun matériaux combustible n'est permis.

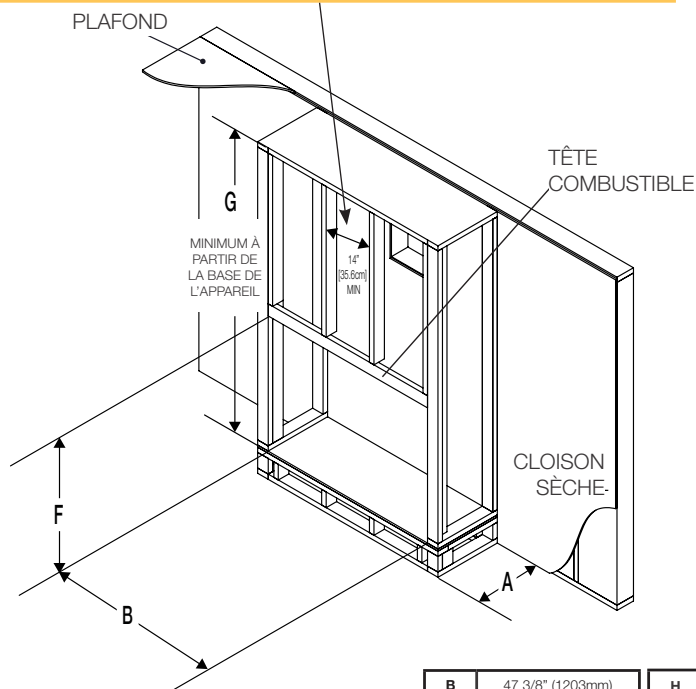

B	47 3/8" (1203mm)
F	39 3/8" (1000mm)
A	18 9/16" (471mm)
G	56" (1422mm)

H	84" (2135mm)
I	3 1/2" (89mm)

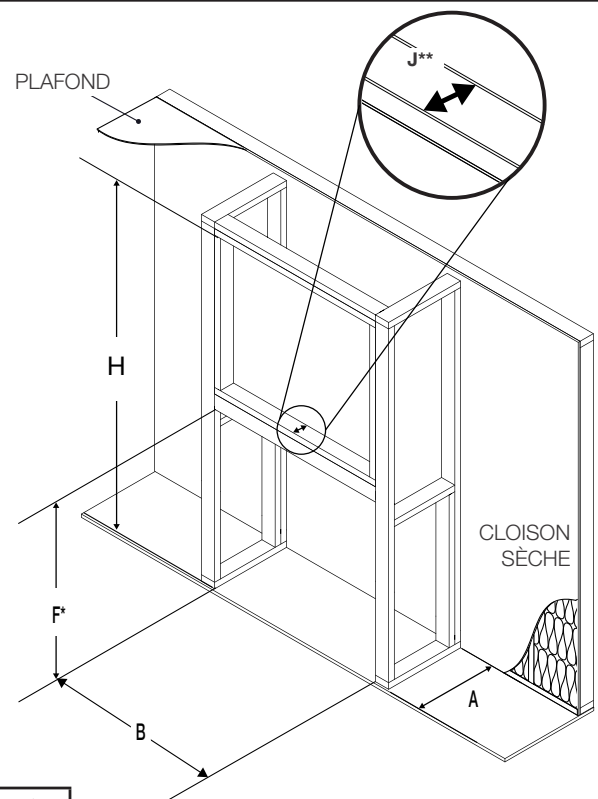

* Tenez compte de l'épaisseur du plancher et du foyer lorsque vous définissez ces dimensions.

** Le cadre de 2" x 4" peut être « renforcé » avec une pièce contraplaqué d'une épaisseur de 3/4" pour supporter le matériel de montage du téléviseur.