
SimpliFire® Fire Made Simple

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

Allusion Platinum 72"

Linear Electric Fireplace
Post-Paint Installation

FRAMING DIMENSIONS

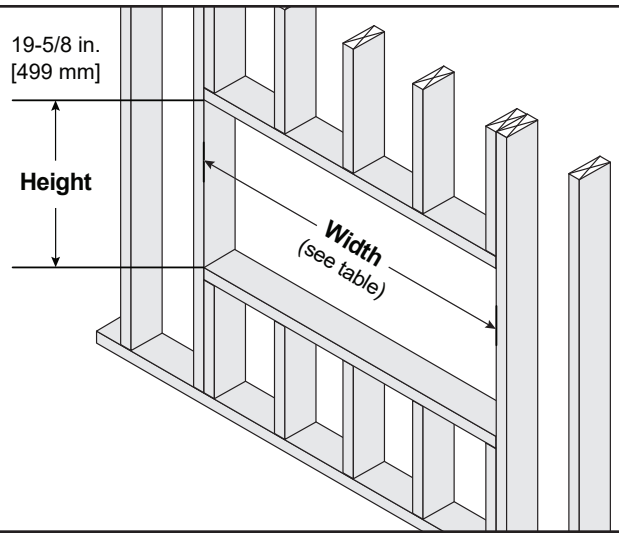


MODEL	UNIT	HEIGHT	WIDTH	DEPTH
SF-ALLP72	in.	19-5/8	73	5-1/2
	mm	499	1854	140


Minimum Framing Depth
2x6 Wall (5-1/2 in. [140 mm])

MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
TOP	0 in.
BOTTOM	0 in.
SIDES	0 in.
BACK	0 in.

AREA	CLEARANCES
FRONT	36 in. [914 mm]
OVERHANG (120V)	0 in.
OVERHANG (240V)	0 in.

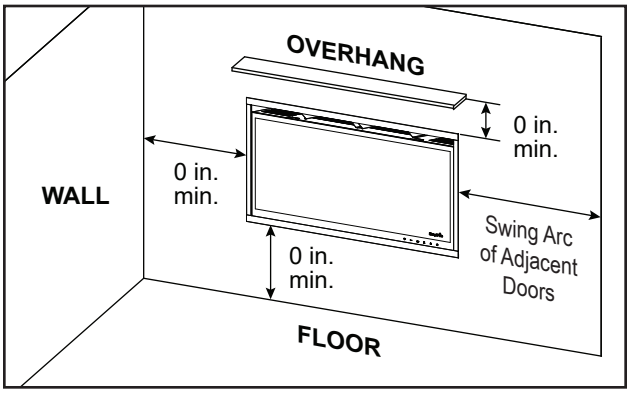

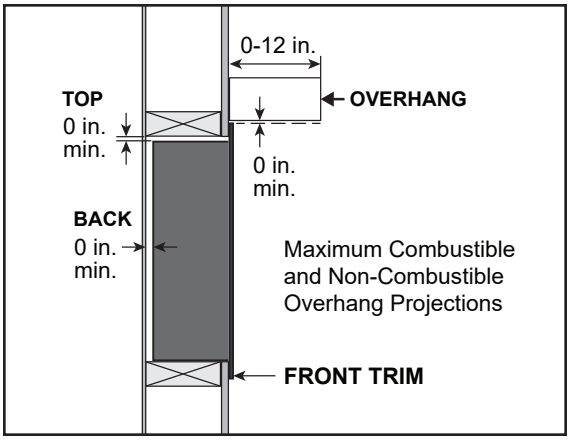

ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz/1400W	Hardwire or plug-in	5,000
20 AMP, 240V/60 Hz/2800W	Hardwire only	10,000

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Allusion Platinum 72"


APPLIANCE CERTIFICATION

MODEL: SF-ALLP72 | LABORATORY: CSA International | STANDARD: CSA C22.2 No 46-13; UL 2021 (4th Edition)

TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters


PRODUCT DIMENSIONS

MODEL	UNIT	A	B	C	D	E	F	G*	H
SF-ALLP72	in.	74-5/8	20-7/8	70-3/8	15-3/16	72-7/16	19-5/16	5-11/16	8-3/8
	mm	1895	530	1787	386	1840	491	145	213

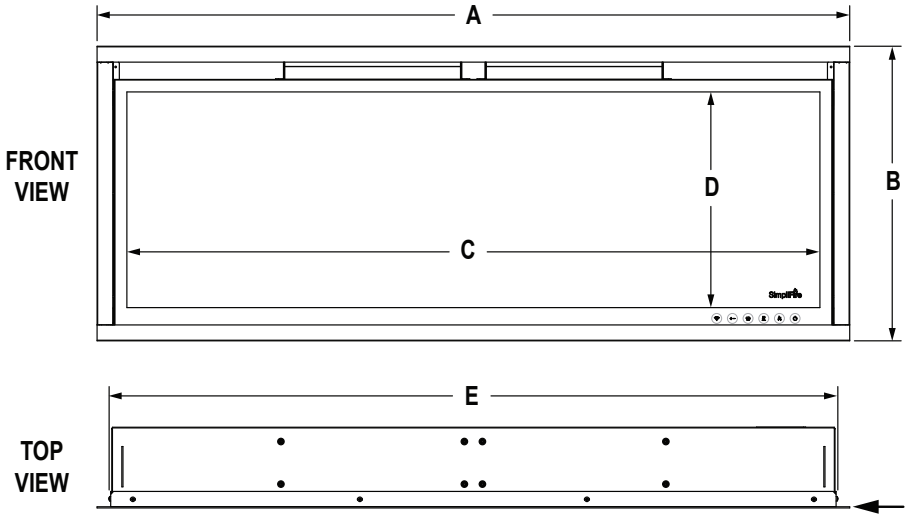

*NOTE: The G depth dimension does not include the front trim of the appliance.

FINISHING

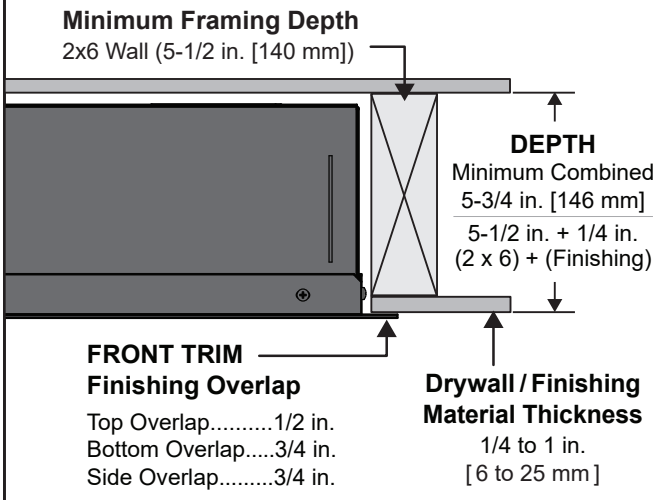

Post-Paint Installation: The drywall/finishing material must be installed before installation of the appliance into the wall. Drywall/finishing material must be brought to the edge of the framed opening to ensure that the front trim of the appliance overlaps the finishing material on all sides.

Required Depth: The appliance requires a minimum combined wall framing and drywall/finishing material thickness of 5-3/4 inches, such as a 2x6 framed wall with a minimum of a 1/4 inch of drywall/finishing material.

The maximum thickness of drywall/finishing material is 1 inch, making the accepted range 1/4 to 1 inch.

The Allusion Platinum is designed for use on painted drywall, tile, wood paneling, shiplap, and other smooth finishes including porcelain and granite, with a total thickness up to 1 inch thick when combined with drywall.

SimpliFire® Fire Made Simple

SimpliFire — A Brand of Hearth & Home Technologies
7571 215th Street West | Lakeville, MN 55044
888-427-3973 | 952-985-6000 | SimpliFire.com