

LE1000


A sophisticated linear statement with wider viewing angles – ideal for spacious living areas and feature walls where the fire becomes the focus.

INBUILT HOLOGRAPHIC ELECTRIC FIREPLACE



Unmatched Realism

Holographic technology combined with precision flame-mapping projects dynamic flames, sparks, and flickers onto lifelike logs and embers - recreating the depth, movement, and authenticity of a real wood-burning fire.

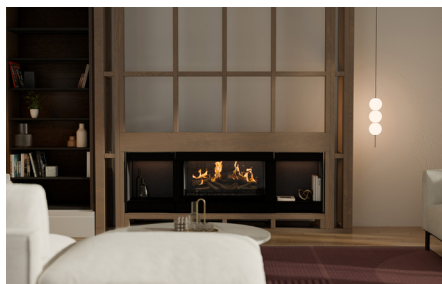

Installation Flexibility

No flues, vents, or consent required – offering complete freedom to install anywhere and integrate seamlessly into any surround material or design.



Effortless Ambiance

This fireplace delivers warmth when needed, or ambiance with flame-only mode – giving you year-round flexibility and effortless control.

LE1000

FIRE BY **escea.**

SPECIFICATIONS

HEAT OUTPUT	5100BTU/hr or 10200BTU/hr
POWER CONSUMPTION	1.5kW @10A 110V ~ 60Hz, or 3.0kW @15A 230V ~ 60Hz
OPERATION	Thermostatic Bluetooth® remote control
APPLIANCE WEIGHT	154lbs
ELECTRICAL CONNECTION ACCESS POINT	Bottom RH side
CLEARANCE TO COMBUSTIBLES	Zero clearance from appliance surfaces
SERVICE ACCESS HATCH	Not Required
CAVITY WALL VENTING	Not Required
CERTIFICATION/COMPLIANCE	UL2021, ICES-003, CSA C22.2 No. 46-13
DATA BADGE	Inside appliance, upper left corner

DIMENSIONS

FIREPLACE SIZE	41 13⁄16" w x 21 1⁄2" h x 17 5⁄16" d
FRAMED OPENING	42 5⁄8" w x 21 7⁄8" h x 17 3⁄4" d
VIEWING AREA	39 5⁄8" w x 16" h
TV CLEARANCE	4" above viewing area


INSTALLATION

The LE1000 is an indoor holographic projection fireplace designed to be built into a false cavity or chase - from standard building materials.

The appliance is to be installed prior to any wall boards or finishes.

For optimal viewing, the LE1000 base should be 12" above the floor.

Wall boards or finishes can be off any thickness, and any standard building material may be used. If finishes extend beyond the 9/16" viewing area trim, consider the visual impact of the material edge.

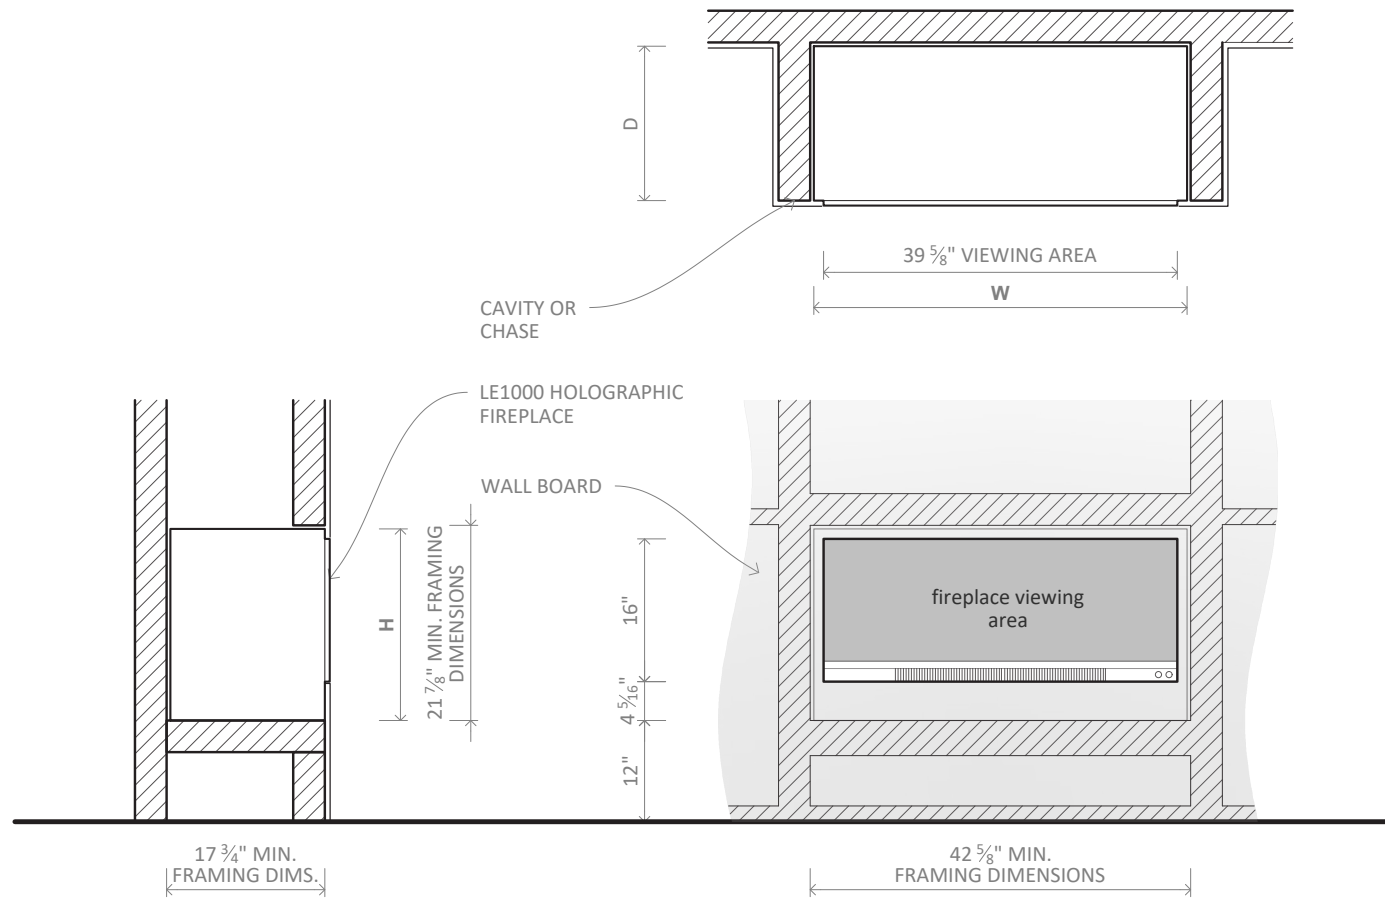

LE SERIES - ALL MODELS

LE800	LE1000	LE1250	LE1550	LE1750	

Further information and technical documents available via the QR code or escea.com/le-series

